


# All Type of Hooks

## carbine hooks



Mark	OVERALL LENGTH	S.W.L. Cwts.	BREAKING LOAD cwt.
	in		
CH 60	2½	1.5	8.50
CH 70	2½	2.0	11.50
CH 80	3½	2.5	12.75
CH 90	3½	3.5	18.00
CH 100	4	3.5	18.00
CH 110	4½	3.5	19.00
CH 120	4½	3.5	19.00
CH 140	5½	5.0	26.00

## swivel spring snaphooks no. 223 code: CYNTHIA

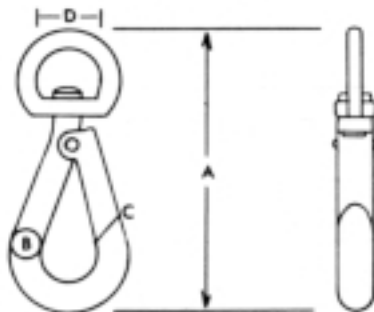

	Flat Steel Tops									Forged Steel Tops
	Malleable Iron Swivel Tops									
A mm	50	56	63	75	88	100	115	128	150	225
A ins	2"	2¼"	2½"	3"	3½"	4"	4½"	5"	6"	8"
B "	7/32	7/32	1/4	9/32	5/16	3/8	13/32	7/16	1/2	11/16
C "	7/32	7/32	1/4	9/32	3/8	7/16	1/2	5/8	3/4	1.1/4
D "	1/2	15/32	9/16	21/32	3/4	15/16	1.1/16	1.1/16	1.1/4	15/16
Lbs per 100	3½	4	6	8½	12	21	28	38½	55	150
Kgs per 100	1½	2	2½	3	5½	9½	12½	17	25	68

**STANDARD SNAPHOOKS to CRUE** Made from prime Mild Steel and available in a full range of finishes. Sizes 2"-2½" and 3" are also available in Solid Brass fitted with carbon or stainless steel springs.




A.

**NOTE:** Extra heavy construction at leverage point to prevent spreading. Heel of binder toggles away from load, permitting easy release.


## L-150 STANDARD LOAD BINDERS

- Forged steel, quenched and tempered.
- Hooks are quenched and tempered alloy steel.



B.

Ball and socket swivel joints at hook assemblies permit a straight line pull.

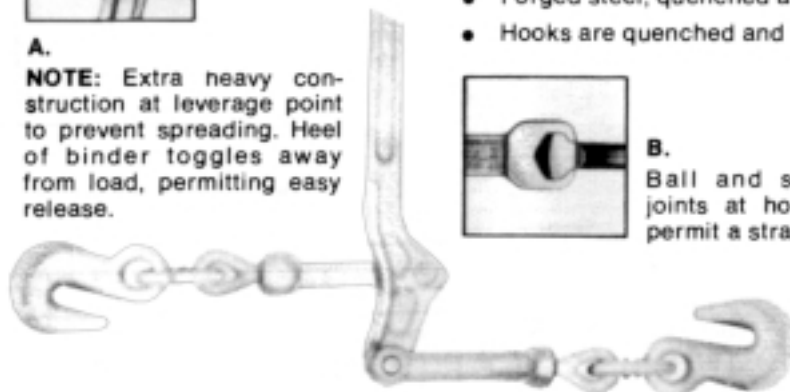

CATALOG NUMBER	MIN-MAX CHAIN SIZE INCHES	HANDLE LENGTH INCHES	TAKE-UP INCHES	WORKING LOAD LIMIT POUNDS	PROOF LOAD POUNDS	MINIMUM ULTIMATE STRENGTH, LBS.	WEIGHT POUNDS EACH
7-1	¾-3/8	16	4½	5400	10800	19000	7.4
A-1	¾-½	18½	4½	9200	18400	33000	11.9
C-1	½-¾	21	4¾	13000	26000	46000	17.5

STANDARD PACK — 4 PER CARTON